


# LINOS F-Theta-Ronar Lens


$f = 100\text{mm}$ , 1030-1080nm, telecentric, fused silica, low absorption

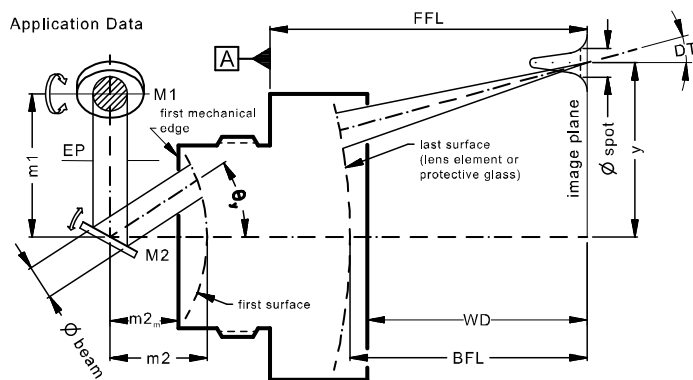

Part number	4401-561-000-26			
Design wavelength	$\lambda$	(nm)	1064	
Effective focal length	EFL	(mm)	105.4	
Back focal length	BFL	(mm)	139.9	
Working distance	WD	(mm)	137.0	
Flange focal length	FFL	(mm)	218.0	
Beam diameter $1/e^2$ truncated	$\varnothing_{\text{beam}}$	(mm)	10.0	14.0
Recommended mirror distance m1	m1	(mm)	13.0	17.0
Recommended mirror distance m2	m2	(mm)	28.0	28.0
Recommended mirror distance $m2_{\text{mechanical}}$	$m2_m$	(mm)	24.0	24.0
Scan angle	$\pm\theta_{x,v}$	( $^\circ$ )	13.1	12.2
Scan area (edge length of scan field)	$2x * 2y$	( $\text{mm}^2$ )	48 x 48	44 x 44
Spot diameter	$\varnothing_{\text{spot}}$	( $\mu\text{m}$ )	21	15
Telecentric error (maximum deviation)	DT	( $^\circ$ )	1.9	2.1
Total transmission @ 1030 - 1080nm	T	(%)	> 96	
Group delay dispersion at $\lambda$	GDD	( $\text{fs}^2$ )	1239	
LIDT coating @ 1064nm, 12ns, 100Hz		( $\text{J}/\text{cm}^2$ )	40	
LIDT coating @ 1030nm, 291fs, 5kHz		( $\text{J}/\text{cm}^2$ )	0.9	
Focused back reflex positions from first surface		(mm)	2.9; 65.0	
Weight		(g)	1650	
Protective glass	PG		4401-499-005-00	

Optical parameters calculated for a 1-mirror system  
 Subject to technical change


## Mechanical drawing

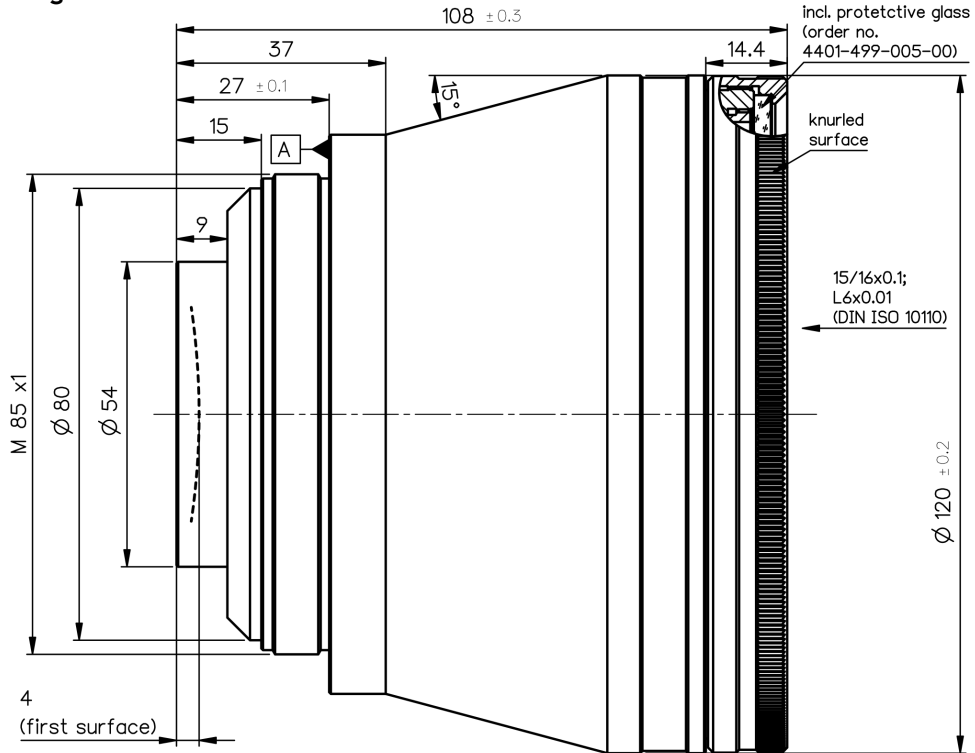

Dimensions without tolerances are nominal values and illustration not to scale

## Spot variation over scan field

Spot radius in  $\mu\text{m}$  at  $1/e^2$  level for a Gaussian laser beam ( $M^2=1$ ), focused over scan field  
Field size and mirror distances as given above for a 2 mirror scan system

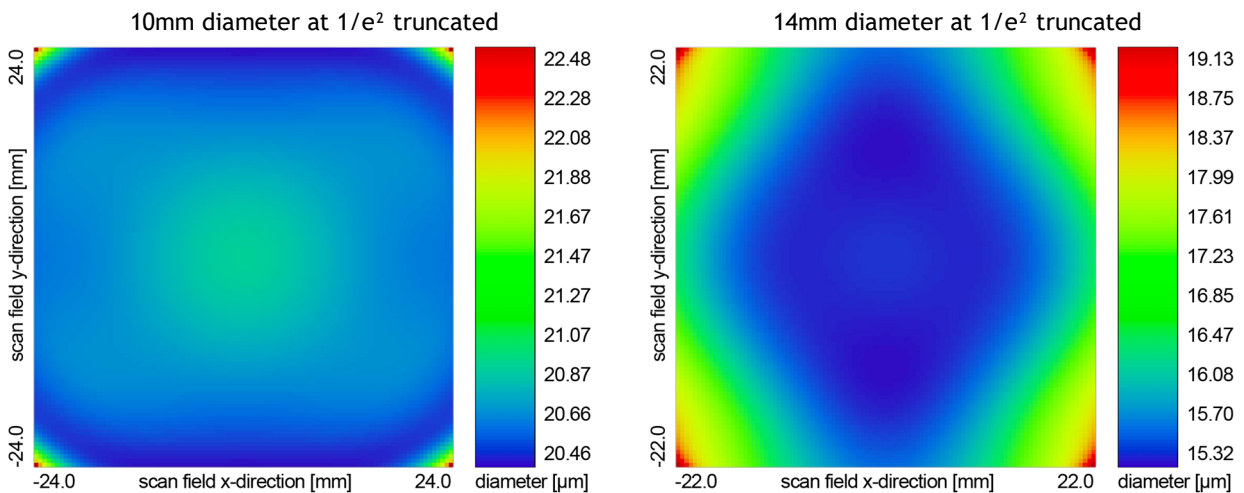

## Notes:



For technical explanations, see our homepage.

In a 1-mirror system, the entrance pupil (EP) is the position of the scan mirror. In a 2-mirror system, it is the point where the scan mirrors should be placed around symmetrically to reach specified performance.