Beam-Expander 2-8x λ = 532 nm

Bestellnr. 4401-446-000-20

order no.

Beam-Expander dargestellt in Stellung Γ' = 8x

Beam-Expander displayed in setting Γ' = 8x

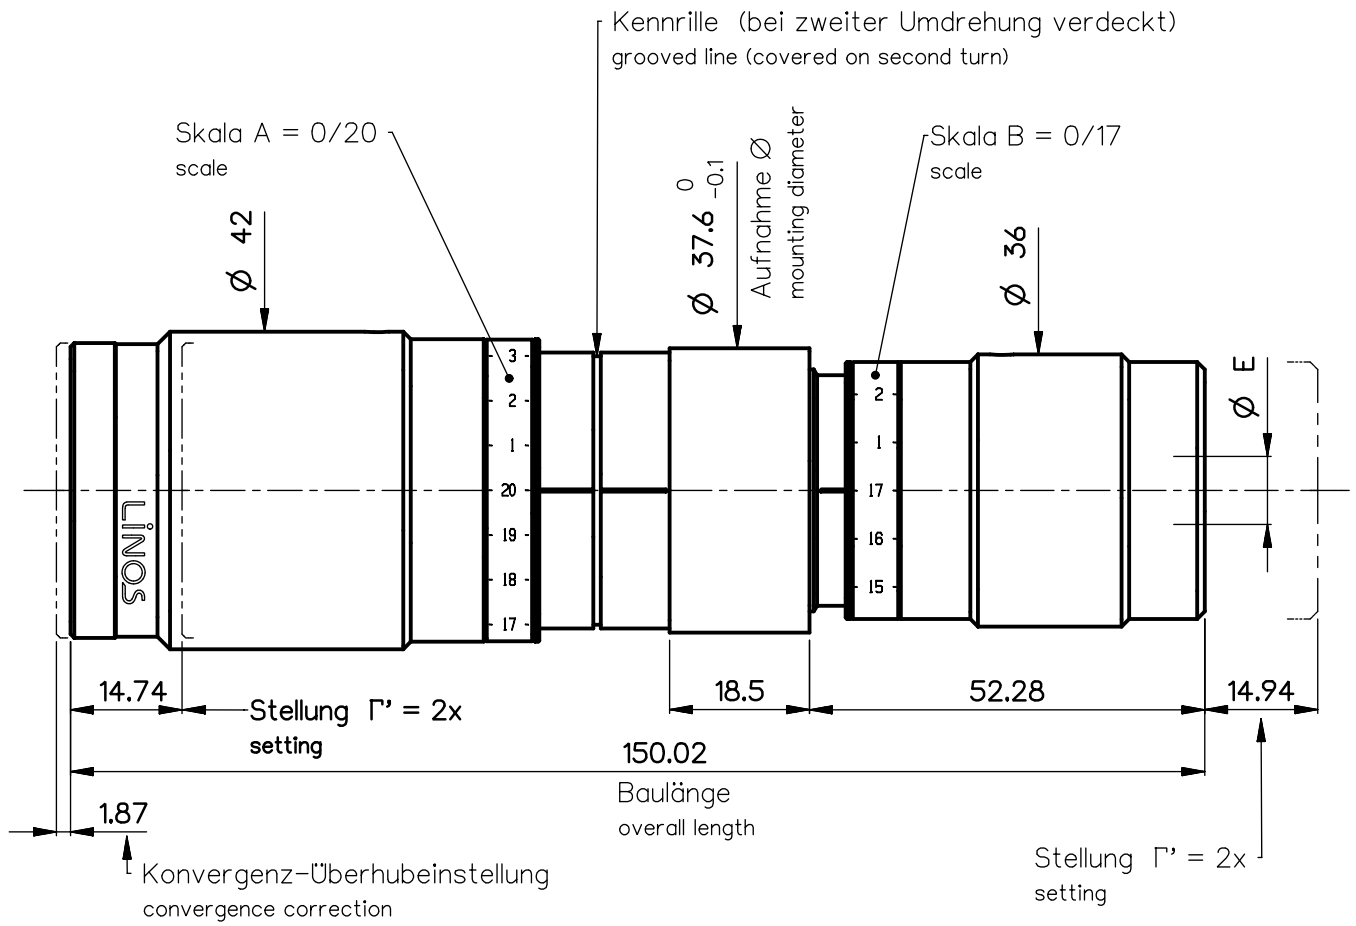

Kurvenblatt mit den Einstellwerten für eine gegebene Aufweitung Γ'

Curve sheet containing the settings for a given expansion Γ'

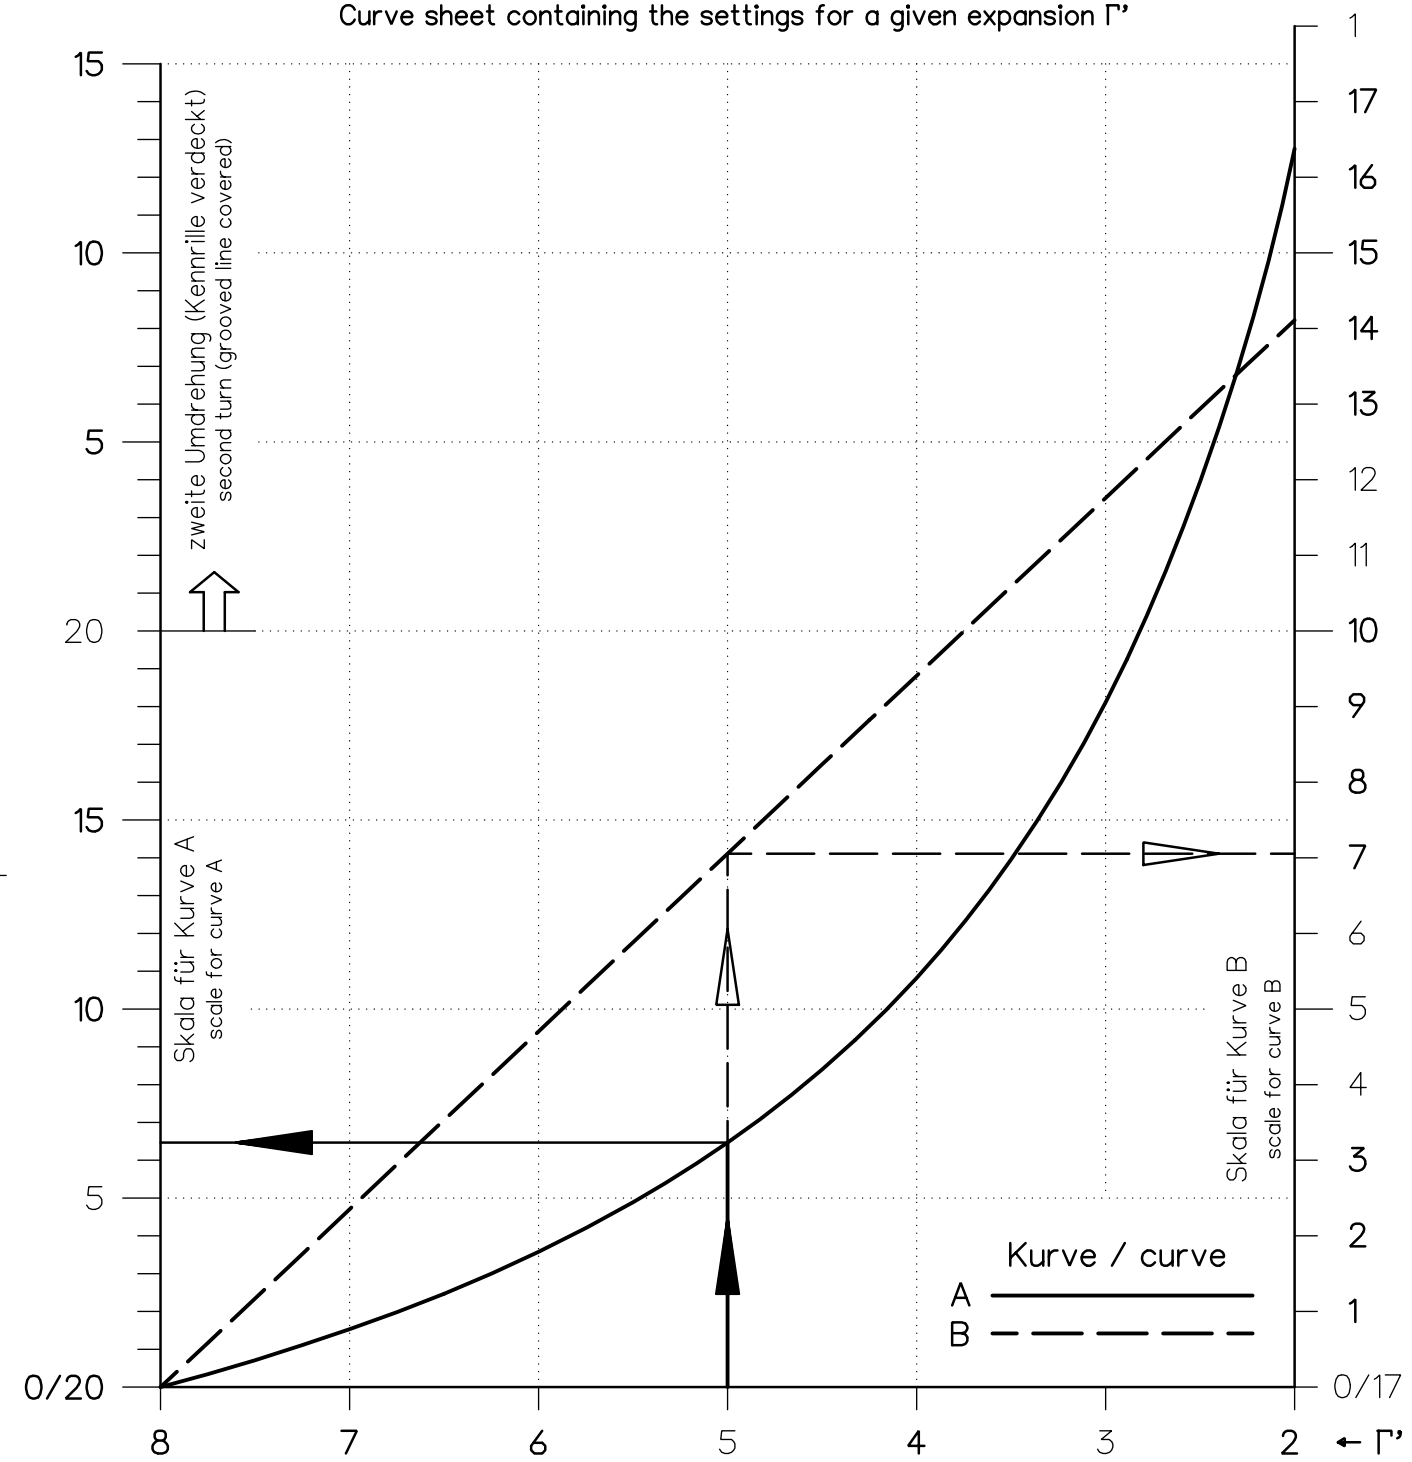

Beispiel für Einstellung auf Γ' = 5 Werte: A = 6.5, B = 7.1

Example for settings to values: B = 7.1

ON 5503-9131 Γ'= 2 - 8x

E_{max} = Ø 4.0 mm

Zubehör: 2 Schutzkappen
accessories: 2 dust caps

Werkstoff: Aluminium eloxiert, schwarz gefärbt
material: aluminium, black anodized

dimensions without tolerances are nominal dimensions

REV	ECC	DATE	NAME
a	Neuausg		
b	06-207	19.07.06	Riegg
c	Anpass.	09.08.06	Goetz

PROTECTIVE NOTE DIN 34 TO BE OBSERVED

UG

DIN A 3

ALL DIMENSIONS ARE IN MM AND INCLUDE SURFACE TREATMENT

GENERAL TOLERANCE OF DIMENSION, FORM, POS. ± 0.1

SURF. TREATMT

BASIC TOLERANCING PRINCIPLE

	DATE	NAME
DRAWN	13.03.06	Riegg
CHKD	13.03.06	Goetz

SCALE 1:1

MATERIAL ---

TITLE

Einstellblatt / Settings

Beam-Expander 2-8x λ = 532 nm

LINOS

DRAWING NO. 4401-446-420-00-0001c

SHEET 1 OF 1

REPLACES